

Prevention of the risks

Measurement and alarm unit
4 gas alarm thresholds

MX 42 A

■ ■ ■ ■ Up to 4 channels

■ ■ ■ ■ Clear measurement's indication

■ ■ ■ ■ 3 gas alarm thresholds
1 default alarm

■ ■ ■ ■ Built-in relays

■ ■ ■ ■ Continuous self-checking



ATEX




INDUSTRIAL SCIENTIFIC

OLDHAM

Global fire and gas detection solutions

■ ■ ■ *Together we'll make your operations safe*

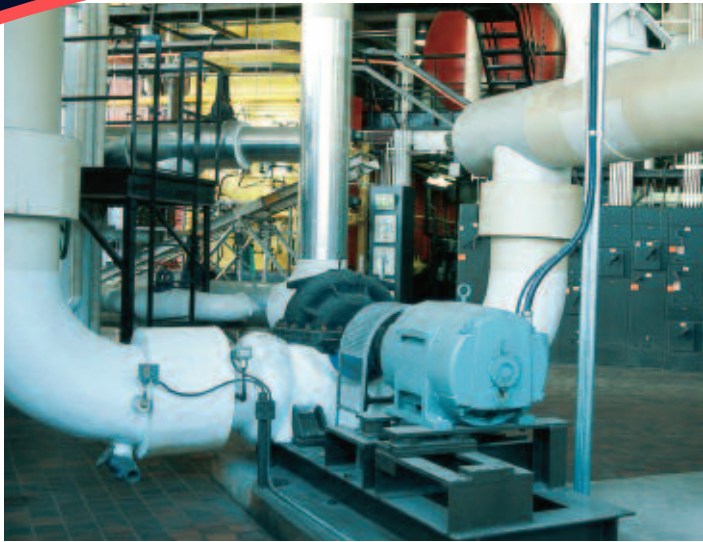

Example of application : boiler plant control unit

The MX 42 A gas and flame measuring and alarm control unit provides you with the perfect response to your need to ensure the safety of your equipment and personnel for work in environments which may contain explosive or toxic gases.

It is connected to the corresponding detectors to efficiently solve your gas detection problems whether in industry, in boiler plants or in car parks.

The MX 42 A can be adapted for one to four separate channels to provide a customized detection system and extremely flexible programming.

The MX 42 A also complies with European directives.

■ ■ ■ *MX 42 A : combining prevention, detection and action*



The MX 42 A can be fitted with one detector per channel in the industrial version and with CO or NO_x detectors in the vehicle park version. The detection capability which is perfectly tailored to your requirements ensures highly effective prevention. The alarm is triggered as soon as the value measured on one of the channels exceeds the corresponding set points.

The relay or relays activate the corresponding slave control systems. For the 3rd threshold, it is also possible to program alarms on the basis of mean values or in time-delayed mode. A special vehicle park software package manages differentials of low and high engine speeds.

Layout in electric equipment cabinet

Enhanced ergonomics and performances


User-friendly

- Easy to adjust
- Wall-mounted housing
- Quick and easy to install
- Power supply : 230 V AC or 115 V AC and 24 V DC (48 V DC on option)

Clear messages

- Clearly LCD display unit
- Display in cyclic mode or direct mode by keypad
- Alarm status faults indicated by LEDs

Ergonomic front panel

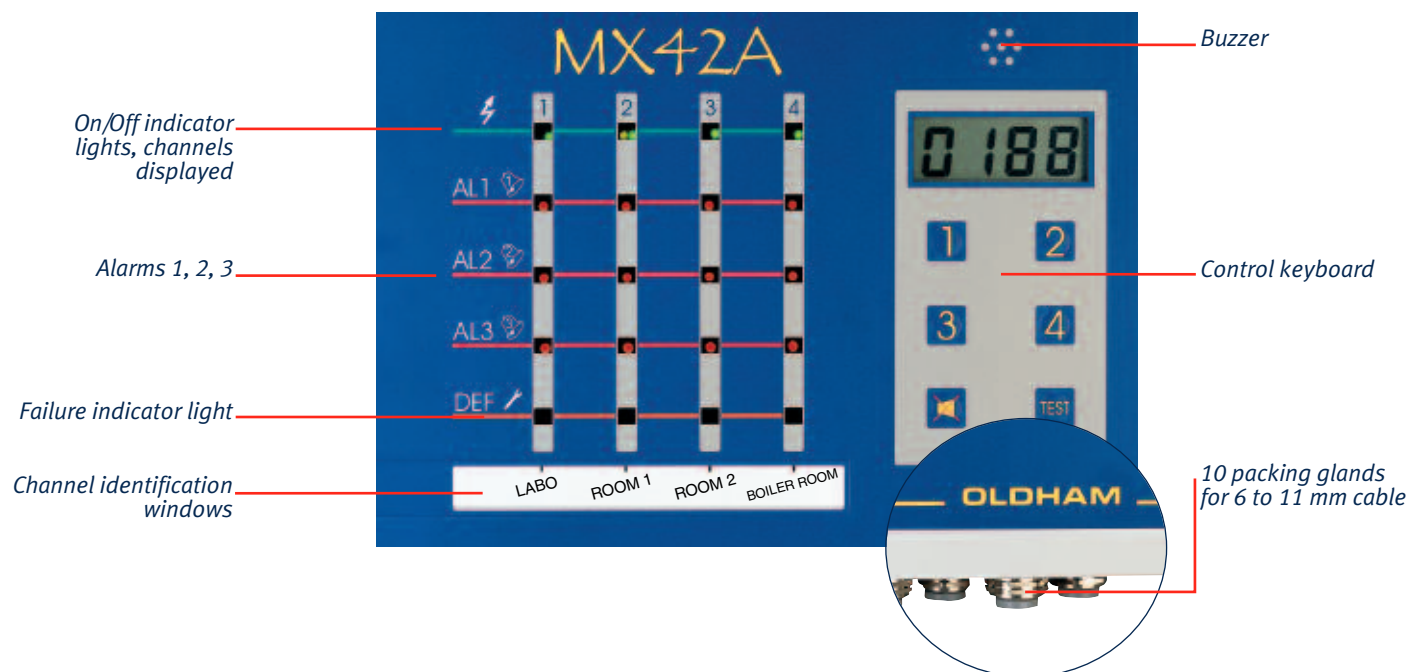

Three alarm levels

- 3 separate alarm levels per channel, programmed in the factory and adjustable by the user
- Built-in relay system compatible with the control logic of fans and extractors, where applicable

Optimal equipment

- 2 separate relays per channel on 1st or 2nd threshold
- Common relay in case of failure
- Analogue output by measuring channel


Reliable control unit

- Protection against electromagnetic disturbances
- Access to protected maintenance menu
- Complete failure monitoring (detectors, control unit and line faults)
- Managed by microprocessor

Technical characteristics

Manufacturer :	• OLDHAM SA
Function :	• Alarm and gas monitor
Capacity :	• 1 to 4 channels
Display :	• Clearly readable LCD
Housing :	• Wall-mounted, polycarbonate IP 54
Fault alarms	
Default alarms :	<ul style="list-style-type: none"> • Yellow LED • Constant monitoring of measuring line • If you exceed 1/2 hour maintenance operating time
Gas alarms :	<ul style="list-style-type: none"> • 3 independent thresholds • 3 specific red indicator lights • Rising or falling thresholds • Automatic or manual clearing (on thresholds 1 and 2), automatic clearing on threshold 3 • 3rd threshold instantaneous, based on mean value or time-delayed (programmable as required) • Thresholds 1 and 2 comply with control logic of extractors (programming)
Audible alarms :	<ul style="list-style-type: none"> • Following failure sequence and measurement alarm • Optional
Relays :	<ul style="list-style-type: none"> • 2 independent relays per channel (programming) on 1st and 2nd threshold • Common relay on threshold 3 • Common failure relay • Positive safety on alarm • Inhibition during maintenance function
Input measurement :	<ul style="list-style-type: none"> • 1 flammable, toxic gas or oxygen detector per channel • Up to 5 CO detectors per channel (vehicle park version) • Loop line resistance • Flammable, 3 wire : 16 Ω (500 m of cables, 1.5 mm²) • 4-20 mA, 2 wire : 32 Ω (1,000 m of cables, 1.5 mm²)

Signal output :	• 4-20 mA per channel, load resistance 600 Ω max.
Power supply :	<ul style="list-style-type: none"> • 115 V AC (+6 % -10 %) 50/60 Hz • 230 V AC (+6 % -10 %) 50/60 Hz • 19 to 30 V DC • 36 to 60 V DC on option • Monitoring by indicator light on each channel • Max. power consumption : 85 V/A or 67 W
Miscellaneous :	<ul style="list-style-type: none"> • Indication of channel displayed • Keyboard for acknowledgement, display and maintenance • Operating temperature : -10°C to +50°C
Dimensions :	• 295 x 340 x 107 mm (high x long x deep)
Weight :	• 5.480 kg
Compliance :	• CE

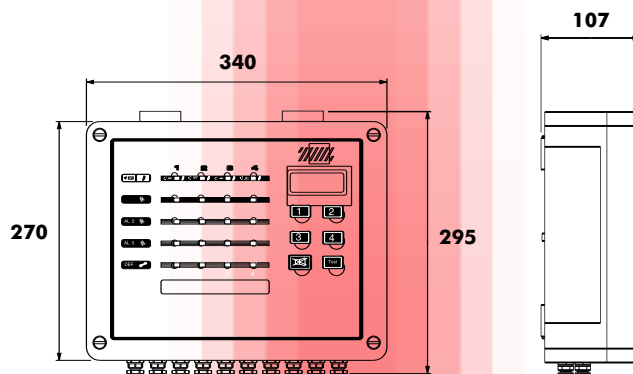

MX 42 A



Your agent or retailer

INDUSTRIAL SCIENTIFIC

OLDHAM

Plant and head office : Z.I. Est - rue Orfila - B.P. 417 - 62 027 ARRAS Cedex FRANCE
 Tel. : 33 3 21 60 80 80 Fax : 33 3 21 60 80 00
 Web site : <http://www.oldhamgas.com>

**EXPORT DEPARTMENT :
 PHONE : 33 3 21 60 80 80 - FAX : 33 3 21 60 80 05**

AMERICAS

Tel.: +1 412 788 4353
 Fax: +1 412 788 8353
 info@indsci.com

ASIA PACIFIC

Tel.: 86 10 8497 3970
 Fax: 86 10 8497 3971
 sales@isc-cn.com

EUROPE

Tel.: 33 3 21 60 80 80
 Fax: 33 3 21 60 80 00
 info@groupoldham.com

AUSTRALIA / NZ

Tel.: +61 2 8870 3400

CZECH REPUBLIC

Tel.: +420 234 622 222/3

GERMANY

Tel.: +49 231 / 9241 0

ITALY

Tel.: +39 011 3801371

MIDDLE EAST

Tel.: +971 50 455 8518

NETHERLANDS

Tel.: +31 76 5427 609

ROMANIA

Tel.: +40 21 312 37 56

SINGAPORE

Tel.: +65 6561 7377

SWITZERLAND

Tel.: +41 26 652 51 18

UNITED KINGDOM

Tel.: +44 0 1782 562002