



ELASEAL® sealing tape pre-compressed sealing tape

description

The product line of **ELASEAL®** offers individual sealing tapes for nearly all fields of application in seal & insulation technology to the point of sealants inside and for building and construction.

Latest production technology and abdication of raw materials containing solvents and CFC make **ELASEAL®** to be an eminently environmental friendly product, which in addition offers protection from dust, noise, coldness, draught and humidity.


Even non-uniform splices are completely filled. Due to the delayed reset time of our self-adhesive sealing material, processing is very easy.

characteristics

- glues with power instead of chemistry
- easy installation due to delayed decompression
- temperature resistance -30 °C up to +90 °C
- Impregnation on basis of dispersion
- high ageing and weathering resistance
- brilliant compatibility with other materials
- fire behaviour, construction class B2, DIN 4102
- eminently environmental friendly

fields of application

- sealing against driving rain, noise, draught and dust in interior & ambient areas
- storefront buildings
- installation of windows and door frames at brickwork, also between different materials
- glass buildings
- floor joints
- expansion joints for flat roofs
- wood construction including interior lining
- building construction between aluminum profiles
- container construction
- automobile industry

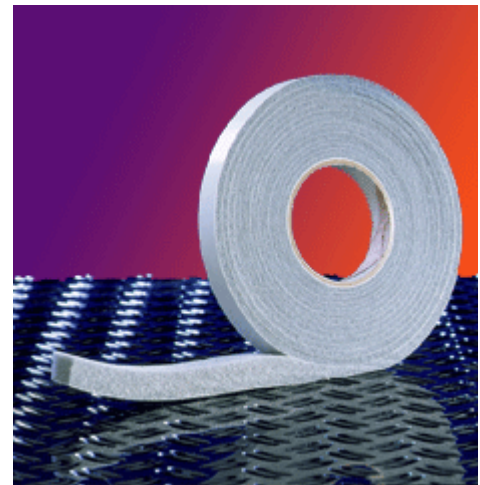

standards

ELASEAL® is available for all common length and width as inside and outside sealing tape.