



planfiltercells prefiltercells with various types of media

description

The fields of application of EMW prefiltercells are multifaceted. Mainly it finds its' fields of application within the range of air intake filtration and air conditioning units, same as in the air intake of turbo-engines.

Our prefiltercells are available in metal frames, in carton frames or [exchangeable plastic frame version](#).

The available filter media are high class glass fibre and synthetic media of the type VERFILTAN[®], SYNFASAN[®], same as our open-cell filter foam, depending on the requirement of application.


Even at 100% relative humidity our prefiltercells offer a brilliant collection efficiency and stability. The reasonable versions in carton frame should not be used in applications, where they come into direct contact with water in form of fog or rain.

characteristics

- filter classes G2 - F5
- environmental friendly materials
- filtercells in plastic and carton frame being fully incinerable
- high stability and yet light construction
- stability at 100% relative humidity

fields of application

- power stations
- ventilating systems and air handling units

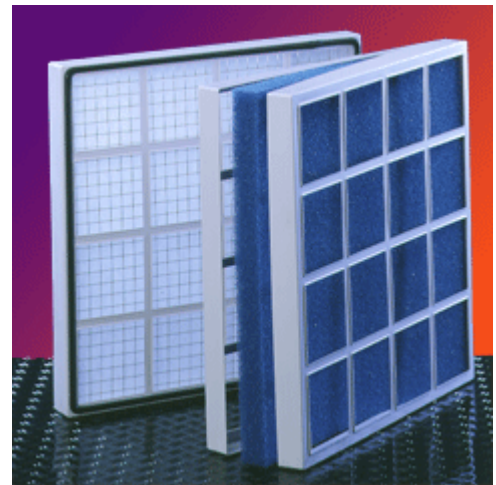

dimensions

596 x 596 x 25mm

596 x 596 x 50mm

490 x 596 x 25mm

490 x 596 x 50mm

292 x 590 x 25mm

292 x 590 x 50mm

Further dimensions you will receive on request